



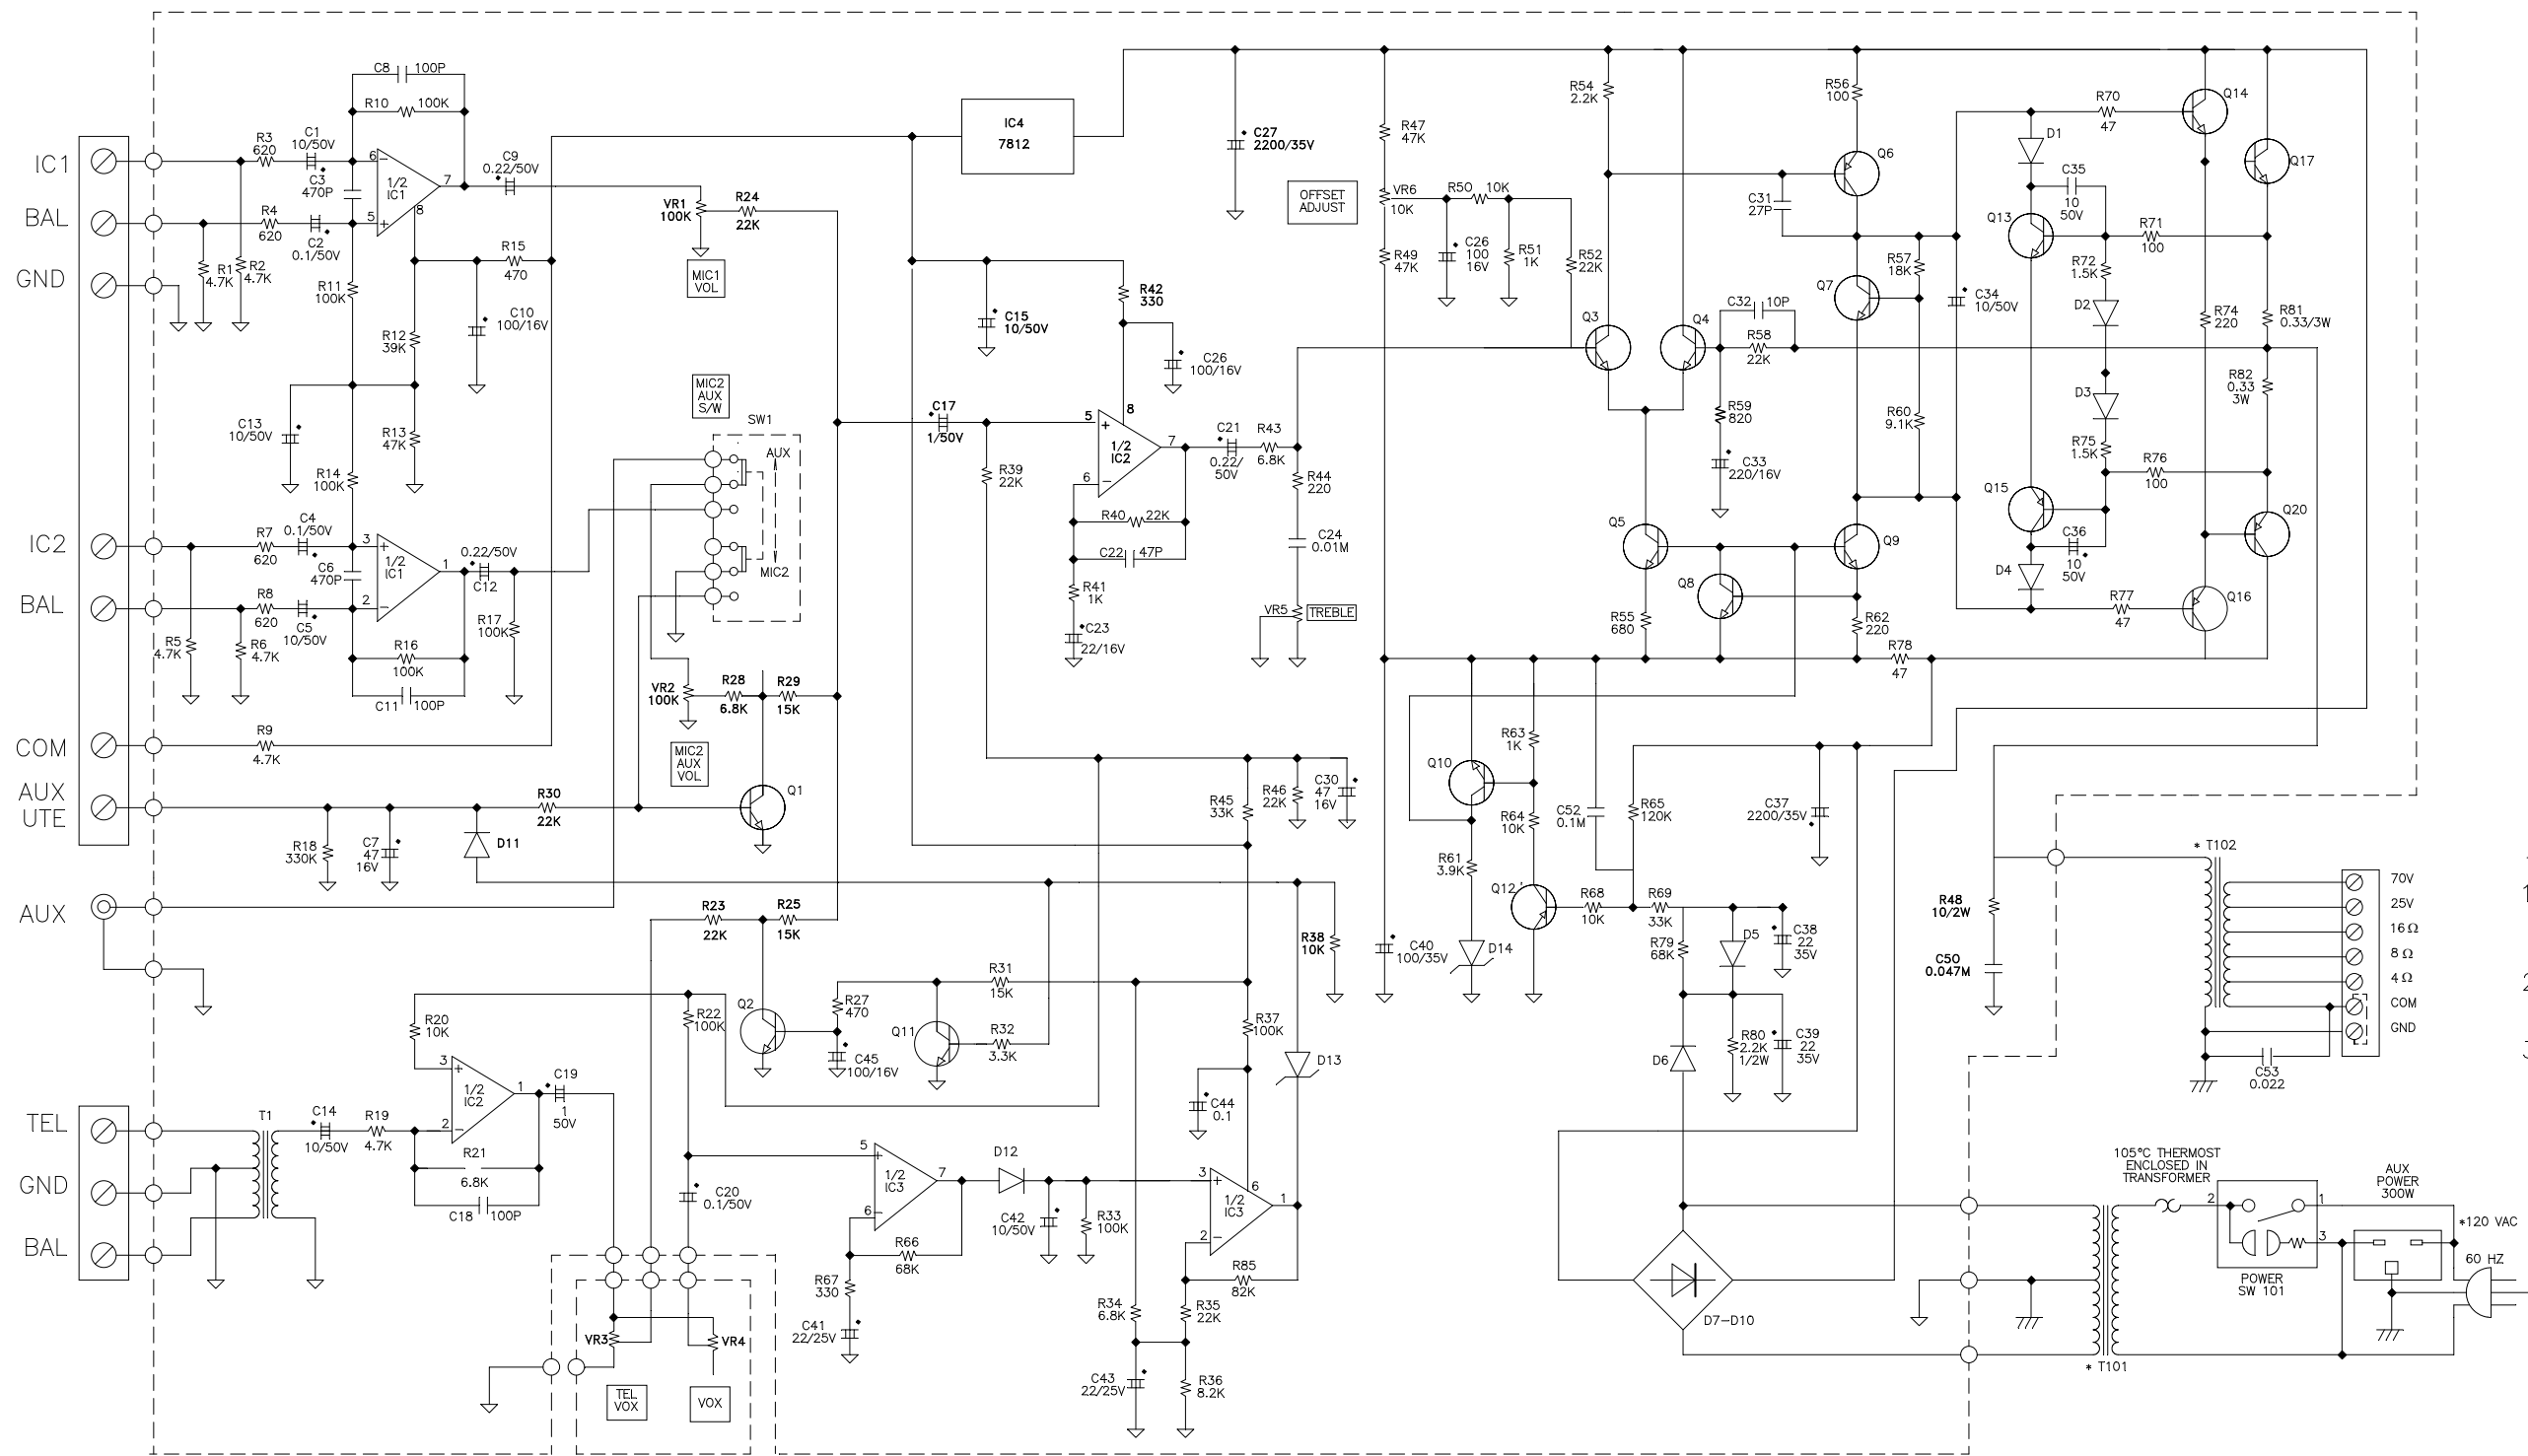

MODEL	T101	T102	POWER LINE CURRENT
C10	83-876-000	83-523-000	.38A
C20	83-877-000	83-534-000	.5A

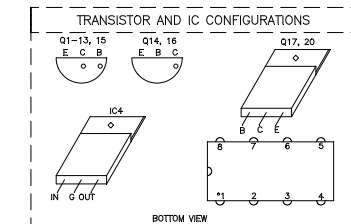

NOTES:

1. UNLESS OTHERWISE SPECIFIED:
ALL RESISTORS ARE 1/4 W. +/-5%
CAPACITORS ARE IN MFD.
2. "↓" DENOTES COMMON CONNECTION
3. "⏏" DENOTES CHASSIS CONNECTION

TECHNICAL SPECIFICATIONS

POWER OUTPUT:
C10 - 10W RMS
C20 - 20W RMS
DISTORTION: LESS THAN 1% @ RPO
FREQUENCY RESPONSE: (20Hz TO 20KHz)
MIC - 55 dB BELOW RATED OUTPUT
AUX - 70dB BELOW RATED OUTPUT
TEL - 70dB BELOW RATED OUTPUT
INPUT SENSITIVITY:
MIC - LO-Z BALANCED 600Ω
AUX - 85mV
TEL - 75mV
OUTPUTS: 4, 8, 16 ohms, 25V, 70V
OUTPUT CONNECTIONS: SCREW TERMINAL STRIP

INPUT CONNECTIONS:
TWO MIC LO-Z TERMINALS, AUX HI-Z JACK,
500/600-ohm LINE WITH WMT-1A ACCESSORY
CONTROLS: MIC 1, MIC2/AUX (SWITCH SELECTED)
TREBLE
TONE CONTROL: TREBLE - -11dB @ 10 KHz
POWER REQUIREMENTS: 120VAC, 60Hz
C10 - 38 WATTS
C20 - 50 WATTS
DIMENSIONS: 11-3/8"W * 2-7/8"H * 7-3/8"D
(28.9x7.3x19.7cm)
SHIPPING WEIGHT:
C10 - 5 lbs. (2.27kg)
C20 - 6 lbs. (2.7kg)



BOGEN CLASSIC SERIES PUBLIC ADDRESS AMPLIFIER

TITLE: WIRING SCHEMATIC - C10 & C20	
NAME: RUSSELL ROTOLO	SCALE: NONE
DATE: 12-26-01	PAGES: 1 OF 4